

FOAM WATER SPRINKLER




TECHNICAL DATA :

Model	F
Mounting	Pendent
Maximum Working Pressure	12.3 Kg. Sq. Cm (175 PSI)
Operating Pressure	2.0 Bar (30 PSI) minimum 4.2 Bar (60 PSI) maximum
End Connection	1/2" BSPT (1/2" NPT Optional)
Material	Brass and Bronze
K-Factor	K-42 standard Other K-factor can be provided as optional
Weight	0.750 Kg.
Ordering Information and	Please specify : Model, End connection Material



systems. These are useful in other wide applications including Air Craft Hangers.

DIMENSIONS

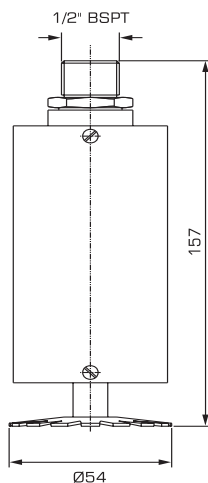

SPECIFICATION

Foam Water Sprinklers are open and air aspirating type. The pattern of coverage is similar to the conventional sprinkler head. The Foam Water Sprinkler has standard orifice with K-factor of 42.

Foam Water Sprinklers are designed to operate at a minimum of 2 bar pressure and maximum of 4.2 bar. The Foam Water Sprinkler with K-42 will deliver about 61 LPM at 2 bar pressure. The standard coverage per Foam Water Sprinkler is 9.3sq.m. (100 sq.ft.)

SYSTEM DESIGN

The following are a few guidelines for minimum requirement of foam system design.


- Foam solution discharge rate : Area of hazard X application rate.
- Minimum foam solution application rate required as per NFPA is 6.5LPM/sq.m. for the area of hazard to be protected.

APPLICATION :


The Foam-Water Sprinklers are used in the deluge foam system to protect the risk where foam is required to be applied from overhead sprinklers and is to be followed with plain water in a standard sprinkler pattern.

Foam Water Sprinklers protect the loading and unloading area in the event of a spill fire with low expansion foam

DISCHARGE PATTERN

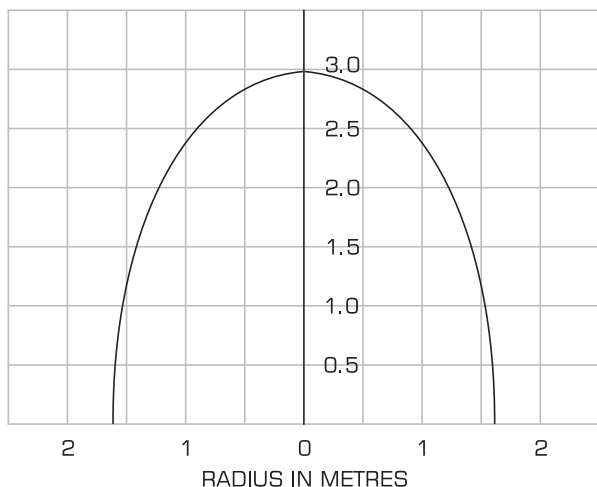

PRESSURE VS FLOW PERFORMANCE CHARACTERISTIC

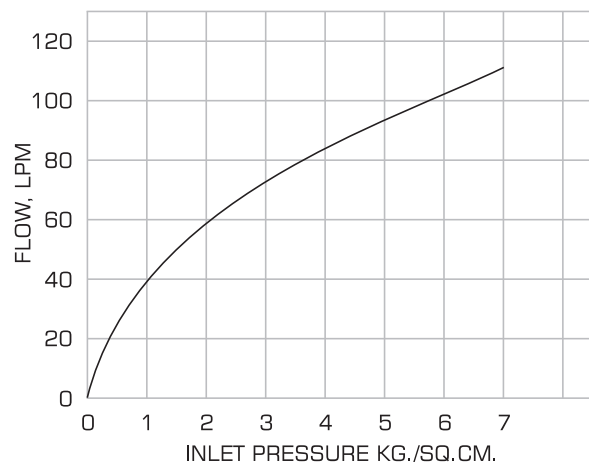

$$Q = K \times \sqrt{P}$$

- Q = Flow in LPM
- P = Pressure in kg/sqcm
- K = K-factor of nozzle.

LIMITED WARRANTY

Products manufactured by K.V. FIRE CHEMICALS (I) PVT.LTD. are warranted against defects in material and workmanship for a period of Two (2) years from the date of shipment. KV's obligation under this warranty is limited to replace or repair the products or its parts, which are shown to KV's examination to be in a defective condition attributable to KV. No warranty is given for products or components which have been subject, to misuse, improper installation, corrosion, wear and tear, improper storage, modification or repaired. If the defect attributable to KV cannot be rectified by repair or replacement, then KV may elect to refund the purchase price of the equipment in complete discharge of its obligation under this Limited Warranty.

IN NO EVENT SHALL K.V. FIRE CHEMICALS (I) PVT. LTD. BE LIABLE IN CONTRACT, STRICT LIABILITY OR ANY OTHER LEGAL THEORY, FOR INCIDENTAL, IN-DIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES, INCLUDING DAMAGES. FOR INJURY TO PERSON OR DEATH OR DAMAGE TO PROPERTY AND OR PENALTIES RESULTING FROM ANY PRODUCTS OR COMPONENT MANUFACTURED OR ASSEMBLED BY KV. THIS IS LIMITED WARRANTY ONLY. KV DISCLAIMS WITH RESPECT TO THE PRODUCTS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND ALL IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE. THERE IS NO WARRANTY OF ANY NATURE MADE BY KV BEYOND AS STATED ABOVE.

NOTICE :

The equipment presented in this bulletin is to be installed in accordance with the latest publication standards of NFPA or other similar organisations and also with the provision of government codes or ordinances wherever applicable. The information provided by us are to the best of our knowledge and belief, and are general guidelines only. Site handling and installation control is beyond our reach. Hence we give no guarantee for result and take no liability for damages, loss or penalties whatsoever, resulting from our suggestion, information, recommendation or damages due to our product. Product development is a continuous programme of K.V. FIRE CHEMICALS (I) PVT. LTD. and hence the right to modify any specification without prior notice is reserved with the company.



KAMALANIWAS, PLOT NO. 32, LANE D, SECTOR 8, VASHI, NAVI MUMBAI 400703 INDIA.
 • PHONE : +(91) 22 2782 0827
 • FAX : +(91) 22 2782 4712
 • EMAIL : info@kvfire.com • WEBSITE : www.kvfire.com