




Technical Specifications :-	
Operating Voltage	24Vdc
Operating Power	≤ 3 Watt
Standby Power	≤ 1.5 Watt
Pre-Alarm Level	12% LEL
Alarm Level	23% LEL
Output :- K1 / K2 V1 / V2	N/O Contact, 3A @ 220Vac 24Vdc Pulse
Temperature Range	-10~ + 50°C
Relative Humidity	≤ 95% , Non-Condensing
Ingress Protection	IP30
Material of Housing	ABS Plastic
Colour	Ivory White
Weight	230 gram
Life of Gas Sensor	5 Years




Features :-

- Combustible Gas Detectors are suitable for LPG, for both residential and commercial usage.
- Built-In Relay Contacts for control of Gas Valves, etc.
- Built-In Sounder with 2 stage alarm
- Manual reset and control (on/off) of relay contacts

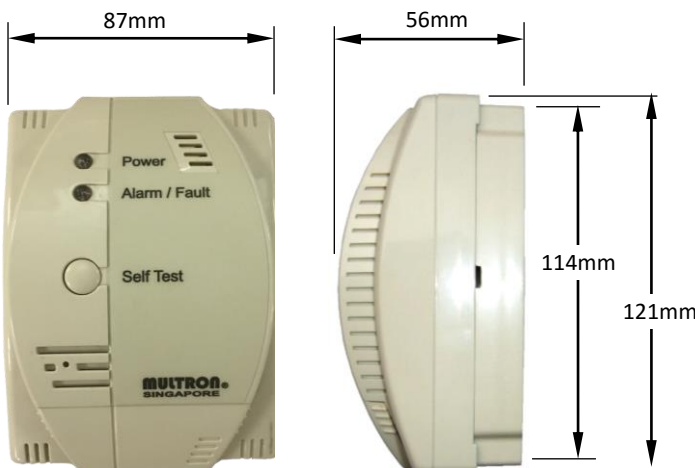

TYPICAL PHYSICAL DIMENSION

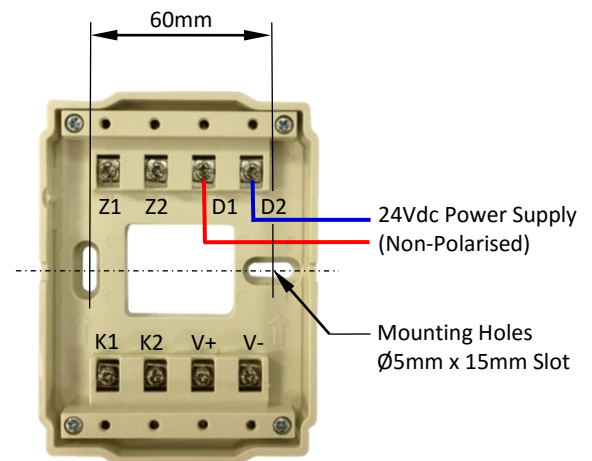

MOUNTING BASE DETAILS

Operation :-

- Power LED (Green) : It flashes during start up, and light up continuously
- Alarm / Fault LED : It will be lighted up in 'Red' during Alarm, and 'Yellow' during Fault
- Buzzer : It will sound twice per second during Alarm, and once every three when reporting fault
- Output Signal : Voltage-free contact provided for remote status monitoring or control.

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

6395 6868
6395 6869

info@multron.com
www.multron.com

