


VF1171-00

16 Channel Input/ Output Board

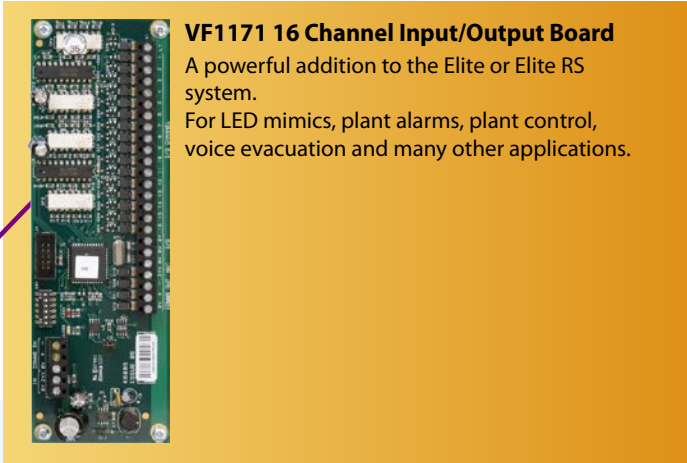

VF1171 16 Channel Input/Output Board

A powerful addition to the Elite or Elite RS system.
For LED mimics, plant alarms, plant control, voice evacuation and many other applications.



Standard Features

- UL approved
- 16 channels
- Each channel configurable as input or output
- Inputs opto-isolated
- Outputs open collector transistor
- Simple 2 wire connection to control panel
- Up to 32 boards supported per panel (512 Input/Output Channels)
- Inputs and outputs configurable as per field devices
- Full cause and effects on all inputs and outputs
- Multi drop RS485 communications
- Can be used with other Elite I/O modules on the same panel
- Compatible with Elite RS panels

Product Overview

- To add more I/O capability to the extensive options already offered by the Elite control panel, up to thirty-two, sixteen channel I/O boards may be connected.
- When using a simple two-wire RS485 communications protocol, these boards may be mounted locally to the control panel or distributed on a bus up to 3,900 feet long by using a suitable cable.
- The flexibility of these boards is further enhanced by the fact that each of the channels is configurable as either an input or an output.
- Each channel may also be configured to produce a variety of input actions or respond to a variety of output types.
- All channels can contribute to, or respond to, system-wide cause and effects logic.
- Typical uses for I/O boards include geographical LED mimic displays and plant alarm inputs.
- Standard Elite control panels contain fixings for one I/O board, which can easily be connected using four small signal wires to the power and comms bus within the panel.
- Consideration must be taken as to the loading on the main panel.

Technical Specifications

Supply voltage: 21 - 30V DC
Quiescent current consumption: 20mA
Current per input: 3mA (maximum)
Current per output: 100mA (maximum)
Communications: RS485 two wire
Max. distance from panel: 3900 feet (using correct type of cable)
PCB size: 7.5" H x 2.4" W
Cable capacity: 2.5mm per terminal
Operating temperature: 14° F to 122° F (-10° C to 50° C)
Operating humidity: to 95% (non condensing)



Manufactured by Kentec Electronics Ltd.
Dartford, DA11JQ, United Kingdom