simon

LIGHT UP EMOTIONS

www.simon.es
http://international.simon.com.cn
export@simon.com.cn

ZMSC 01E JUL 2016 printing

LED LIGHTING

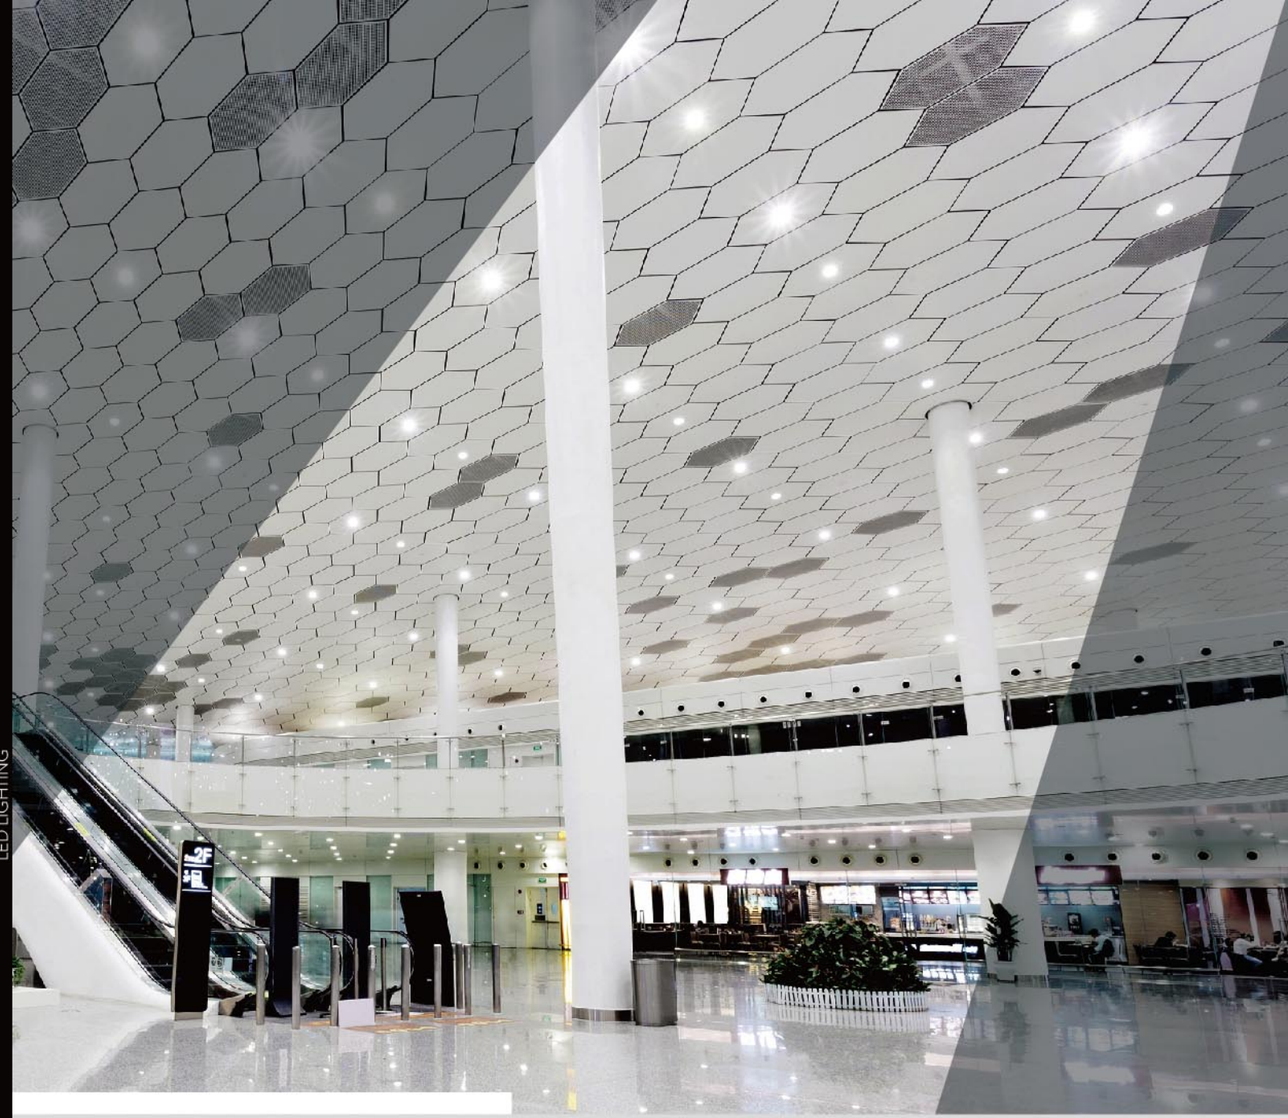

LED lighting solutions

simon

simon

Since 1916 From Barcelona

SMART SOLUTIONS FOR DEMANDING ENVIRONMENTS

Simon LED range solutions is able to fullfill all your necessities.

Home,office, commercial, hotel and residential.

LAMPS

Professional Products:

MR16 GU10 PAR AR111 12(G95)W

Consumer Products:

3W 5W 7W 9W 11W 13W

INDOOR LUMINARIES

Downlight:

LED Downlight BlackRing UFO

LED Grace Downlight LED Wave Downlight

ROUND Downlight White Inner Ring

SQUARE Downlight White Inner Ring

LED Spotlight:

Regular Spotlight AG Spotlight

PC Spotlight COB Spotlight

LED COMMERCIAL LUMINARIES

LED Grilled Spotlights LED Striplights

Commercial downlight LED panel lights Tubes

SOLUTIONS

Hotel

All range of LED items to solve of your problems inside of Hotel facilities.

Hall, reception

LED Downlight

UFO

Shared facilities

Downlight

Panel

Spotlights

Private rooms, suites

Downlight

PAR

AR111

Residential

Our LED products could cover any demand from the end customer, contractor and developer.

Bathroom

Classic bulb

UFO

Grace&Wave

Bedroom

Classic bulb

Spotlights

UFO

Residential

Our LED products could cover any demand from the end customer, contractor and developer.

Kitchen

Spotlights

Downlights

Grilled Spotlights

Retail

We dispose all proffesional lighting according your requirements.

Store

Strip lights

Tubes

Panel Lights

Besides we provide with professional solutions for:
Hospitality, Supermarkets, Museums, Public facilities...

LED LAMPS

Characteristics:

· Very low energy consumption.
· Shockproof and vibration - proof thanks to LED technology.
· Extremely long life.
· No UV and near - IR radiation in the light beam.
· Instant 100 % light, no warm - up time.
· Can be easily fitted instead of ordinary light bulbs.

Areas of application:

· Domestic applications
· General illumination
· Outdoor applications only in suitable luminaires

INDOOR LUMINARIES

DOWNLIGHT&SPOTLIGHT

All kind of solution for interior environments,
"Simon" will fit in all kind of designs.

DOWNLIGHT

- Round/Square Black Ring Downlight
- White/Black Antiglare Downlight
- Round/Square White Ring Downlight
- UFO
- Wave Downlight
- Grace Downlight

SPOTLIGHT

- LED Spotlight
- Anti glare LED Spotlight
- PC LED Spotlight
- COB LED Spotlight

DOWNLIGHT

LED Downlight provide ambient lighting that is extremely comfortable, for specific zones such as fitting rooms, reception areas and public conveniences... or accent lighting to highlight objects on shelves or in display cases.

Models:

- Round/Square Black Ring Downlight
- White/Black Antiglare Downlight
- Round/Square White Ring Downlight
- UFO
- Wave Downlight
- Grace Downlight

Input Voltage:

220V- 240V

Input Power:

5W~18W

Color temperature:

Cold White
Natural White
Warm White

Driver include

Finished:

☐ White

Applications:

Hotel

Showroom

Hospital

Shopping mall

BLACK RING DOWNLIGHT

Installation of Clamp Spring:



Installation:

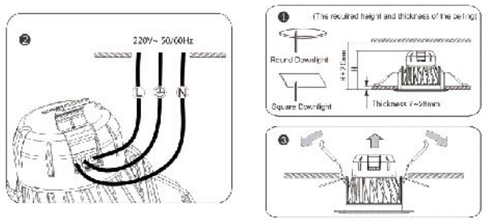

Applications:

Office Shop Hotel Supermarket House

Benefits:

- Low power consumption, energy saving compared to fluorescent lamp
- Long life span over 50,000 hours, 2 years warranty
- Competitive price, excellent service
- Lower maintanance cost and high reliability
- Exclusive design and easy installation

General features:

Beam angle (°):	90
Power factor:	≥0.7
Surface color:	White
IP level:	IP20
Driver:	Internal issolated
Input voltage:	220V-50/60Hz
Luminaire efficacy (Lm/w):	>45Lm/w
Main body materials:	Aluminium +PC
Recommended working temperature (°C):	-20°C to 45°C
Storage temperature:	-30°C to 65°C
Color rendering Index (Ra):	>80

UFO

Benefits:

- Low power consumption, energy saving compared to fluorescent lamp
- Long life span over 50,000 hours, 2 years warranty
- Competitive price, excellent service
- Lower maintanance cost and high reliability
- Exclusive design and easy installation

General features:

Beam angle (°):	>105°
Surface color:	White
IP level:	IP 20
Driver:	Integrated
Input voltage:	220V-50/60Hz
Luminiare efficacy (Lm/w):	>65Lm/w
Main body materials:	PC, thermal conductive
Recommended working temperature(°C):	-20°C to 40°C
Storage temperature:	-20°C to 40°C
Color rendeing Index (Ra):	>80

Installation:



1. Turn off the power
2. Drill a suitable mounting hole on ceiling according to size requirement of different item
3. Connect the commercial power wire with the reserved power supply outlet. Pinch both springs, then push light into installation hole. Make sure the light fixed well
4. Double-check everything is well-connected, then turn on the power

Applications:

Office Hotel House Shop

GRACE DOWNLIGHT

30000 HOURS | 90° | 110/220 VAC | IP20 IP44

Technical Specification:

- Thermal conductive plastic coated aluminum, enough good heat sinking.
- Fashion looking and good cost performance.
- Very good lumen efficency.
- V-0 flame rating.
- Driver built-in.
- Warranty: 2 years.

Input Power:

5W~20W

Color temperature:

3000K~6000K

Applications:

Hotel

Office

House

WAVE DOWNLIGHT

SPOTLIGHT

LED - technology - based recessed spotlight range aimed at surface lighting applications

Models:

- LED Spotlight
- Anti glare LED Spotlight
- PC LED Spotlight
- COB LED Spotlight

Luminous Flux:

260~480

Input Power:

3W~5W

Color temperature:

Cold White
Natural White
Warm White

Range:

Antiglare Spotlight
PC Spotlight
COB Spotlight

Finished:

- Light Silver
- Sand Gold
- Sand Silver
- Ivory
- Metal Silver

Applications:

Retail

Museums&Exhibition

House

LED COMMERCIAL

Hotel:

- The LED also allows generating colour effects in order to design "light" that gives a hotel its own identity.
- Hotel lighting must establish a balance between guest comfort and moderate consumption.
- LED solves both problems, because they have minimum maintenance and consumption costs, in addition to high luminic sensations

Office buildings:

- From reception to meeting rooms, illumination is an important part of a company's image.
- Offices,that's why the right style and lighting level have to be found for every area, while also considering european standards.
- And without forgetting about energy savings, in both lighting and air conditioning.

Retail:

- The first objective of good lighting in the retail business Is to generate interest, standing out above the rest.
- Second, every product must be specifically lighted, whether a garment, a type of food or jewelry, there by making it more attractive to the public eye.
- And finally, the predisposition to purchase has to be stimulated by creating the right sensations: colour fidelity, comfort in changing rooms (preventing heat is essential), etc.

Restaurants:

- Good lighting is what allows the right atmosphere to be created in every area of a restaurant.
- Even different atmospheres according to whether its day or night.
- In any event, assuring optimum visual comfort for diners, with no glare, dark areas or colour alterations.

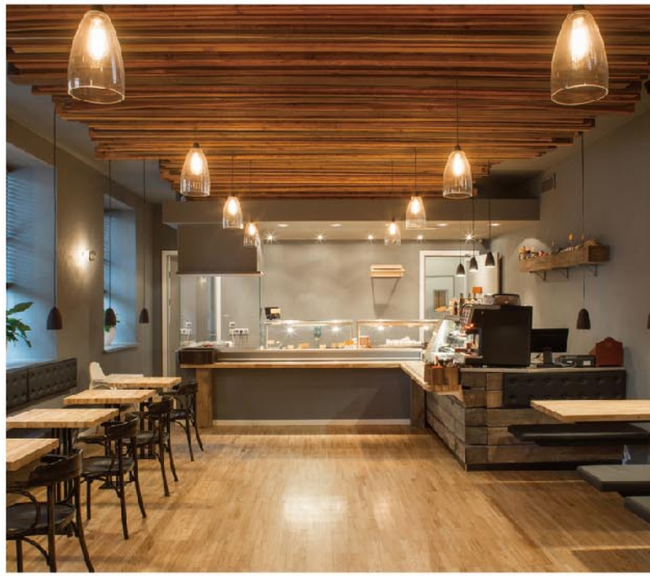

Museums and exhibitions:

- LED luminaires are the perfect solution for proper lighting and decoration in museums and exhibitions as it combines safety and luminic capacity in equal parts.

Public facilities(hospital):

- Hospitals LED technology opens new frontiers in hospital lighting by giving these spaces maximum quality light and efficiency, enabling energy savings of up to 50%.
- This lighting system does not emit heat frontally or IR or UV radiation, contributing both to user comfort and generating bright and diaphanous light for healthcare professionals, especially in operating theatres and laboratories.

LED GRILLED SPOTLIGHTS

Applications:

House

Shopping mall

Characteristics:

· LED Grilled Spotlight with high luminous efficiency for its size, with high luminous efficiency... Ideal for bathing product islands, wide shelf areas, display cases and general lighting.

LED COMMERCIAL DOWNLIGHT

· LED semicircle cover adjustable downlight
· LED ellipse cover adjustable downlight
· LED circle cover non-adjustable downlight
· LED white anti-glare reflector adjustable downlight
· LED black anti-glare reflector adjustable downlight
· LED mirror reflector adjustable downlight
· LED matt reflector adjustable downlight
· LED champagne reflector adjustable downlight

STRIPLIGHT

Applications:

Hotel

Office

Characteristics:

· The flexible Simon LED strip integrates with minimum visual impact in projects, providing a lighting effect that highlights a project's architectural forms. The extra flat line and easy installation makes it ideal for corridors, display cabinets, shelves, etc.

PANEL LIGHT

General features:

Main body materials:	Plastic
Finishing:	Aluminum
IP level:	IP 20
Input voltage:	220V-50/60Hz
Power factor:	>0.9
Luminaire efficacy (Lm/w):	80Lm/m
Color rendering Index (Ra):	≥80
Certification:	CE
36W	
Beam angle (°):	115
Driver:	Internal
Recommended working temperature(°C):	-20°C to 40°C
Storage temperature:	-40°C to 75°C
40W	
Beam angle (°):	105
Driver:	External
Recommended working temperature(°C):	-20°C to 45°C
Storage temperature:	-30°C to 60°C

Benefits:

- Low power consumption, energy saving compared to fluorescent lamp
- Long life span over 50,000 hours, 2 years warranty
- Competitive price, excellent service
- Lower maintanance cost and high reliability
- Exclusive design and easy installation

Applications:

Office

House

Installation:

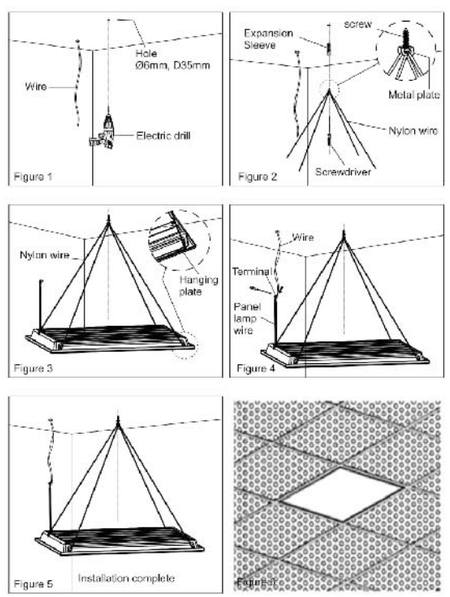

TUBES

Benefits:

- Safer and easy installation
- 100% light when switched on, no run up time
- Longlife span up to 30.000 hours
- 2 years of warranty
- Competitive price, excellent service

Applications:

Office

Parking

Industrial

Supermarket

Warehouse

General features

Beam angle (°):	180°
Surface color:	White
IP level:	IP 20
Driver:	Internal/ Non-isolated
Input voltage:	220V-50/60Hz
Power factor:	>0.55
Luminiare efficacy (Lm/w):	>80Lm/w
Main body materials:	Aluminum and PC
Recommended working temperature(°C):	-15°C~45°C
Storage temperature:	-20°C to 65°C
Color rendeing Index (Ra):	70
Finishing:	Anode oxidation
Lamp holder:	G13
Installation:	Fixed

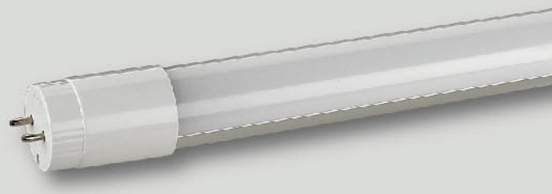

LED LAMP

PROFESSIONAL PRODUCTS: MR16

Product Description	Item code	Lamp holder	Input voltage (V)	Input power (W)	Luminous flux (Lm)	CRI	Beam angle (°)	Colour temperature	Product size (mm)	IP	Quantity /Carton
LED MR16 3W 3000K 30D	N62E0-0010	Gu5.3	AC12V	3	270	80	30	3000K	Φ50×48	IP20	40PCS/CTN
LED MR16 3W 4000K 30D	N62E0-0011	Gu5.3	AC12V	3	270	80	30	4000K	Φ50×48	IP20	40PCS/CTN
LED MR16 5W 3000K 30D	N62E0-0014	Gu5.3	AC12V	5	380	80	30	3000K	Φ50×48	IP20	40PCS/CTN
LED MR16 5W 4000K 30D	N62E0-0015	Gu5.3	AC12V	5	380	80	30	4000K	Φ50×48	IP20	40PCS/CTN
Driver for MR16 above (Economic)	N65E0-0003		AC220V (Output:11.5V)	2~10 (Output)						IP20	50PCS/CTN
Driver for MR16 above (CE)	N65E0-0004		AC220V (Output:11.5V)	2~10 (Output)						IP20	50PCS/CTN

PROFESSIONAL PRODUCTS: GU10

Product Description	Item code	Lamp holder	Input voltage (V)	Input power (W)	Luminous flux (Lm)	CRI	Beam angle (°)	Colour temperature	Product size (mm)	IP	Quantity /Carton
LED GU10 3W 3000K	N62E0-0033	GU10	AC220-240V	3	225	80	120	3000K	Φ49.5×57	IP44	40PCS/CTN
LED GU10 3W 4000K	N62E0-0034	GU10	AC220-240V	3	240	70	120	4000K	Φ49.5×57	IP44	40PCS/CTN
LED GU10 3W 6500K	N62E0-0035	GU10	AC220-240V	3	250	70	120	6500K	Φ49.5×57	IP44	40PCS/CTN
LED GU10 4W 3000K	N62E0-0036	GU10	AC220-240V	3	250	80	120	3000K	Φ50×57.5	IP44	40PCS/CTN
LED GU10 4W 4000K	N62E0-0037	GU10	AC220-240V	3	260	70	120	4000K	Φ50×57.5	IP44	40PCS/CTN
LED GU10 4W 6500K	N62E0-0038	GU10	AC220-240V	3	280	70	120	6500K	Φ50×57.5	IP44	40PCS/CTN

PROFESSIONAL PRODUCTS: PAR

Product Description	Item code	Lamp holder	Input voltage (V)	Input power (W)	Luminous flux (Lm)	CRI	Beam angle (°)	Colour temperature	Product size (mm)	IP	Quantity /Carton
LED PAR20 7W 3000K	N62E0-0024	E27	AC220-240V	7	350	80	20	3000K	Φ63×90	IP44	40PCS/CTN
LED PAR20 7W 4000K	N62E0-0025	E27	AC220-240V	7	370	70	20	4000K	Φ63×90	IP44	40PCS/CTN
LED PAR20 7W 6500K	N62E0-0026	E27	AC220-240V	7	420	70	20	6500K	Φ63×90	IP44	40PCS/CTN
LED PAR30 12W 3000K	N62E0-0027	E27	AC220-240V	12	550	80	20	3000K	Φ97×111	IP44	40PCS/CTN
LED PAR30 12W 4000K	N62E0-0028	E27	AC220-240V	12	620	70	20	4000K	Φ97×111	IP44	40PCS/CTN
LED PAR30 12W 6500K	N62E0-0029	E27	AC220-240V	12	580	70	20	6500K	Φ97×111	IP44	40PCS/CTN
LED PAR38 15W 3000K	N62E0-0030	E27	AC220-240V	15	680	80	20	3000K	Φ120×132	IP44	40PCS/CTN
LED PAR38 15W 4000K	N62E0-0031	E27	AC220-240V	15	700	70	20	4000K	Φ120×132	IP44	40PCS/CTN
LED PAR38 15W 6500K	N62E0-0032	E27	AC220-240V	15	750	70	20	6500K	Φ120×132	IP44	40PCS/CTN

PROFESSIONAL PRODUCTS: AR111

Product Description	Item code	Lamp holder	Input voltage (V)	Input power (W)	Luminous flux (Lm)	CRI	Beam angle (°)	Colour temperature	Product size (mm)	IP	Quantity /Carton
LED AR111 12W 3000K	N62E0-0039	G53	AC12V	12	550	80	30	3000K	Φ110×60	IP44	40PCS/CTN
LED AR111 12W 4000K	N62E0-0040	G53	AC12V	12	580	80	30	4000K	Φ110×60	IP44	40PCS/CTN
LED AR111 12W 6500K	N62E0-0041	G53	AC12V	12	620	80	30	6500K	Φ110×60	IP44	40PCS/CTN
Driver for AR111 above (Economic)	N65E0-0003		AC220V (Output:11.5V)	2~10 (Output)						IP20	50PCS/CTN
Driver for AR111 above (CE)	N65E0-0004		AC220V (Output:11.5V)	2~10 (Output)						IP20	50PCS/CTN

LED LAMP



PROFESSIONAL PRODUCTS: 12W(G95)

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED 12W 3000K G95	N62E0-0084	3000K	950	Φ95×128	12	105*105*150mm	550*230*175mm	0.145	10PCS/CTN
LED 12W 4000K G95	N62E0-0085	4000K	1000	Φ95×128	12	105*105*150mm	550*230*175mm	0.145	10PCS/CTN
LED 12W 6000K G95	N62E0-0086	6000K	1050	Φ95×128	12	105*105*150mm	550*230*175mm	0.145	10PCS/CTN



CONSUMER PRODUCTS: 3W(G45)

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED 3W 3000K G45	N62E0-1001	3000K	240	Φ45×83	3	51*51*89mm	280*280*200mm	0.0328	50PCS/CTN
LED 3W 4000K G45	N62E0-1002	4000K	240	Φ45×83	3	51*51*89mm	280*280*200mm	0.0328	50PCS/CTN
LED 3W 6000K G45	N62E0-1003	6000K	240	Φ45×83	3	51*51*89mm	280*280*200mm	0.0328	50PCS/CTN



CONSUMER PRODUCTS: 3W(E14)

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED 3W 3000K E14	N6224-0051	3000K	180	Φ35×102	3	40*40*130mm	175*135*150mm	0.03	12PCS/CTN
LED 3W 4000K E14	N6224-0052	4000K	200	Φ35×102	3	40*40*130mm	175*135*150mm	0.03	12PCS/CTN



CONSUMER PRODUCTS: 5W(G50)

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED 5W 3000K G50	N62E0-1013	3000K	400	Φ50×100	5	54*54*108mm	290*290*241mm	0.2	50PCS/CTN
LED 5W 4000K G50	N62E0-1014	4000K	400	Φ50×100	5	54*54*108mm	290*290*241mm	0.2	50PCS/CTN
LED 5W 6000K G50	N62E0-1015	6000K	400	Φ50×100	5	54*54*108mm	290*290*241mm	0.2	50PCS/CTN

LED LAMP



CONSUMER PRODUCTS: 7W(A60)

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED 7W 3000K A60	N62E0-0074	3000K	720	Φ60×108	7	66*66*126mm	350*350*275mm	0.056	50PCS/CTN
LED 7W 4000K A60	N62E0-0075	4000K	720	Φ60×108	7	66*66*126mm	350*350*275mm	0.056	50PCS/CTN
LED 7W 6000K A60	N62E0-0076	6000K	720	Φ60×108	7	66*66*126mm	350*350*275mm	0.056	50PCS/CTN



CONSUMER PRODUCTS: 9W(A60)

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED 9W 3000K A60	N62E0-0077	3000K	720	Φ60×108	7	66*66*126mm	350*350*275mm	0.08	50PCS/CTN
LED 9W 4000K A60	N62E0-0078	4000K	720	Φ60×108	7	66*66*126mm	350*350*275mm	0.08	50PCS/CTN
LED 9W 6000K A60	N62E0-0079	6000K	720	Φ60×108	7	66*66*126mm	350*350*275mm	0.08	50PCS/CTN



CONSUMER PRODUCTS: 11W(A60)

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED 11W 3000K A60	N62E0-1007	3000K	880	Φ60×120.2	11	66*66*126mm	350*350*275mm	0.056	50PCS/CTN
LED 11W 4000K A60	N62E0-1008	4000K	880	Φ60×120.2	11	66*66*126mm	350*350*275mm	0.056	50PCS/CTN
LED 11W 6000K A60	N62E0-1009	6000K	880	Φ60×120.2	11	66*66*126mm	350*350*275mm	0.056	50PCS/CTN



CONSUMER PRODUCTS: 13W(A67)

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED 13W 3000K A67	N62E0-1010	3000K	1040	Φ67×134.93	13	72*72*142mm	380*380*305mm		50PCS/CTN
LED 13W 4000K A67	N62E0-1011	4000K	1040	Φ67×134.93	13	72*72*142mm	380*380*305mm		50PCS/CTN
LED 13W 6000K A67	N62E0-1012	6000K	1040	Φ67×134.93	13	72*72*142mm	380*380*305mm		50PCS/CTN

INDOOR LUMINARIES



N03E0-0001



DOWNLIGHT: ROUND BLACK RING DOWNLIGHT

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Hole size(mm)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
2'5 LED downlight 5W 3000K	N03E0-0001	3000K	230	Φ100×75	5	Φ85	118*115*90mm	255*250*300mm	0.22	12PCS/CTN
2'5 LED downlight 5W 5700K	N03E0-0002	5700K	280	Φ100×75	5	Φ85	118*115*90mm	255*250*300mm	0.22	12PCS/CTN
3' LED downlight 7W 3000K	N03E0-0003	3000K	380	Φ110×75	7	Φ95	118*115*90mm	255*250*300mm	0.24	12PCS/CTN
3' LED downlight 7W 5700K	N03E0-0004	5700K	450	Φ110×75	7	Φ95	118*115*90mm	255*250*300mm	0.24	12PCS/CTN







N03E0-0005



DOWNLIGHT: SQUARE BLACK RING DOWNLIGHT

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Hole size(mm)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED downlight 5W 3000K	N03E0-0005	3000K	275	95×95×75	5	Φ85	155*155*85mm	328*328*280mm	0.2	12PCS/CTN
LED downlight 5W 5700K	N03E0-0006	5700K	320	95×95×75	5	Φ85	155*155*85mm	328*328*280mm	0.2	12PCS/CTN
LED downlight 9W 3000K	N03E0-0007	3000K	540	125×125×80	9	Φ105	189*189*85mm	396*396*280mm	0.3	12PCS/CTN
LED downlight 9W 5700K	N03E0-0008	5700K	630	125×125×80	9	Φ105	189*189*85mm	396*396*280mm	0.3	12PCS/CTN
6' LED downlight 12W 3000K	N03E0-0049	3000K	755	160×160×82	12	Φ140	240*243*102mm	500*495*325mm	0.54	12PCS/CTN
6' LED downlight 12W 4000K	N03E0-0050	4000K	970	160×160×82	12	Φ140	240*243*102mm	500*495*325mm	0.54	12PCS/CTN
6' LED downlight 12W 6000K	N03E0-0051	5700K	1100	160×160×82	12	Φ140	240*243*102mm	500*495*325mm	0.54	12PCS/CTN



N03E0-1001



UFO

Product Description	Item code	Power factor	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Hole size(mm)	Packaging inner box	Packaging carton	Cutt off size	Quantity /Carton
4'Ultra-thin downlight	N03E0-1001	>0.5	3000K	300	Φ115×31	6	Φ71	117*115*45mm	48*38*26mm	Φ100×110	60PCS/CTN
4'Ultra-thin downlight	N03E0-1002	>0.5	4000K	350	Φ115×31	6	Φ71	117*115*45mm	48*38*26mm	Φ100×110	60PCS/CTN
4'Ultra-thin downlight	N03E0-1003	>0.5	6000K	400	Φ115×31	6	Φ71	117*115*45mm	48*38*26mm	Φ100×110	60PCS/CTN
6'Ultra-thin downlight	N03E0-1004	>0.8	3000K	750	Φ170×32	11	Φ120	172*170*45mm	48*37*37mm	Φ150×160	40PCS/CTN
6'Ultra-thin downlight	N03E0-1005	>0.8	4000K	770	Φ170×32	11	Φ120	172*170*45mm	48*37*37mm	Φ150×160	40PCS/CTN
6'Ultra-thin downlight	N03E0-1006	>0.8	6000K	800	Φ170×32	11	Φ120	172*170*45mm	48*37*37mm	Φ150×160	40PCS/CTN
8'Ultra-thin downlight	N03E0-1007	>0.9	3000K	1200	Φ220×32	18	Φ170	220*220*50mm	53*47*47mm	Φ200×210	40PCS/CTN
8'Ultra-thin downlight	N03E0-1008	>0.9	4000K	1300	Φ220×32	18	Φ170	220*220*50mm	53*47*47mm	Φ200×210	40PCS/CTN
8'Ultra-thin downlight	N03E0-1009	>0.9	6000K	1400	Φ220×32	18	Φ170	220*220*50mm	53*47*47mm	Φ200×210	40PCS/CTN
9'Ultra-thin downlight	N03E0-1010	>0.9	3000K	1400	Φ240×32	20	Φ190	242*240*50mm	79*51*27mm	Φ220×230	30PCS/CTN
9'Ultra-thin downlight	N03E0-1011	>0.9	4000K	1450	Φ240×32	20	Φ190	242*240*50mm	79*51*27mm	Φ220×230	30PCS/CTN
9'Ultra-thin downlight	N03E0-1012	>0.9	6000K	1500	Φ240×32	20	Φ190	242*240*50mm	79*51*27mm	Φ220×230	30PCS/CTN

INDOOR LUMINARIES



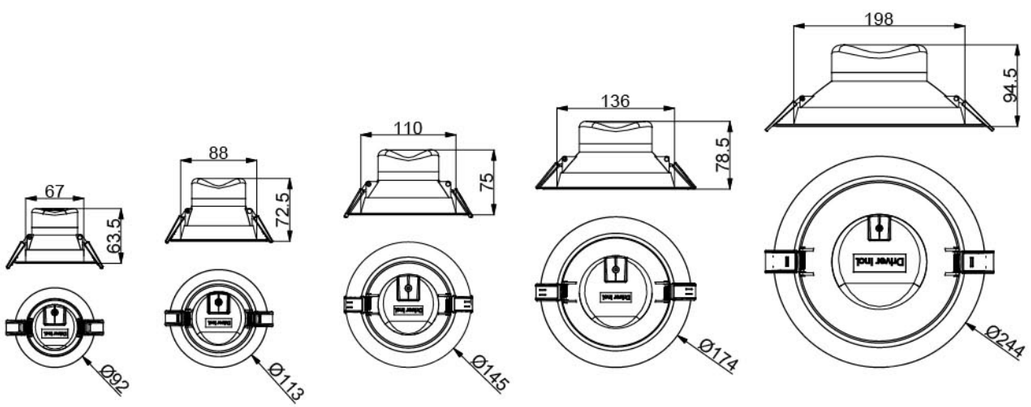

N03E0-1028 N03E0-1031 N03E0-1036 N03E0-1039 N03E0-1042

DOWNLIGHT: LED GRACE DOWNLIGHT

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Input power (W)	CDR	Driver	Product size (mm)	Cut out(mm)	Quantity /Carton	Gross weight(kg/ctn)	Net weight(kg/ctn)
LED 5W 3000K Grace downlight	N03E0-1028	3000K	380	5	>80	Integrated	Φ92*63.5	Φ68~80	120PCS/CTN	20	18
LED 5W 4000K Grace downlight	N03E0-1029	4000K	400	5	>80	Integrated	Φ92*63.5	Φ68~80	120PCS/CTN	20	18
LED 5W 6000K Grace downlight	N03E0-1030	6000K	400	5	>80	Integrated	Φ92*63.5	Φ68~80	120PCS/CTN	20	18
LED 8W 3000K Grace downlight	N03E0-1031	3000K	650	8	>80	Integrated	Φ113*72.5	Φ90~102	80PCS/CTN	17	16
LED 8W 4000K Grace downlight	N03E0-1032	4000K	680	8	>80	Integrated	Φ113*72.5	Φ90~102	80PCS/CTN	17	16
LED 8W 6000K Grace downlight	N03E0-1035	6000K	680	8	>80	Integrated	Φ113*72.5	Φ90~102	80PCS/CTN	17	16
LED 12W 3000K Grace downlight	N03E0-1036	3000K	1000	12	>80	Integrated	Φ145*75	Φ120~130	60PCS/CTN	19	17
LED 12W 4000K Grace downlight	N03E0-1037	4000K	1050	12	>80	Integrated	Φ145*75	Φ120~130	60PCS/CTN	19	17
LED 12W 6000K Grace downlight	N03E0-1038	6000K	1050	12	>80	Integrated	Φ145*75	Φ120~130	60PCS/CTN	19	17
LED 14W 3000K Grace downlight	N03E0-1039	3000K	1150	14	>80	Integrated	Φ174*78.5	Φ145~155	40PCS/CTN	17	15
LED 14W 4000K Grace downlight	N03E0-1040	4000K	1200	14	>80	Integrated	Φ174*78.5	Φ145~155	40PCS/CTN	17	15
LED 14W 6000K Grace downlight	N03E0-1041	6000K	1200	14	>80	Integrated	Φ174*78.5	Φ145~155	40PCS/CTN	17	15
LED 16W 3000K Grace downlight	N03E0-1042	3000K	1720	16	>80	Integrated	Φ244*94.5	Φ195~210	20PCS/CTN	15	13
LED 16W 4000K Grace downlight	N03E0-1043	4000K	1800	16	>80	Integrated	Φ244*94.5	Φ195~210	20PCS/CTN	15	13
LED 16W 6000K Grace downlight	N03E0-1044	6000K	1800	16	>80	Integrated	Φ244*94.5	Φ195~210	20PCS/CTN	15	13



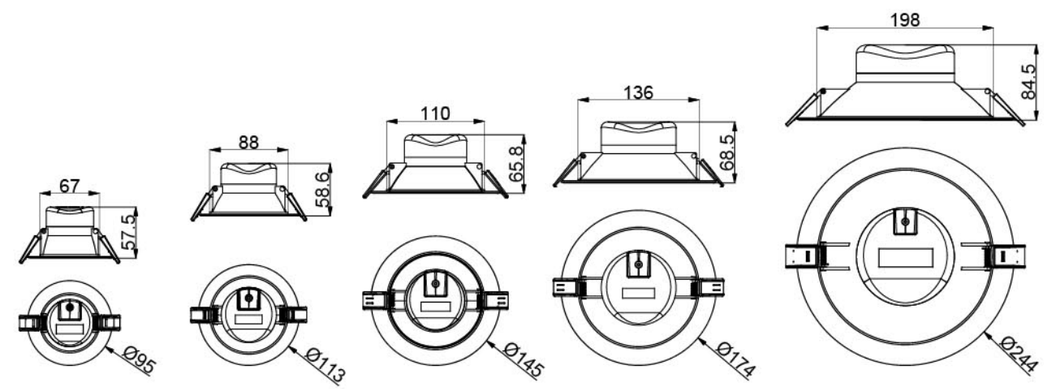

N03E0-1013 N03E0-1016 N03E0-1019 N03E0-1022 N03E0-1025

DOWNLIGHT: LED WAVE DOWNLIGHT

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Input power (W)	CDR	Driver	Product size (mm)	Cut out(mm)	Quantity /Carton	Gross weight(kg/ctn)	Net weight(kg/ctn)
LED 5W 3000K Wave downlight	N03E0-1013	3000K	400	5	>80	Integrated	Φ95*57.5	Φ68~80	120PCS/CTN	20	18
LED 5W 4000K Wave downlight	N03E0-1014	4000K	425	5	>80	Integrated	Φ95*57.5	Φ68~80	120PCS/CTN	20	18
LED 5W 6000K Wave downlight	N03E0-1015	6000K	425	5	>80	Integrated	Φ95*57.5	Φ68~80	120PCS/CTN	20	18
LED 8W 3000K Wave downlight	N03E0-1016	3000K	680	8	>80	Integrated	Φ113*58.6	Φ90~102	80PCS/CTN	17	16
LED 8W 4000K Wave downlight	N03E0-1017	4000K	720	8	>80	Integrated	Φ113*58.6	Φ90~102	80PCS/CTN	17	16
LED 8W 6000K Wave downlight	N03E0-1018	6000K	720	8	>80	Integrated	Φ113*58.6	Φ90~102	80PCS/CTN	17	16
LED 12W 3000K Wave downlight	N03E0-1019	3000K	1030	12	>80	Integrated	Φ145*65.8	Φ120~130	60PCS/CTN	19	17
LED 12W 4000K Wave downlight	N03E0-1020	4000K	1080	12	>80	Integrated	Φ145*65.8	Φ120~130	60PCS/CTN	19	17
LED 12W 6000K Wave downlight	N03E0-1021	6000K	1080	12	>80	Integrated	Φ145*65.8	Φ120~130	60PCS/CTN	19	17
LED 14W 3000K Wave downlight	N03E0-1022	3000K	1200	14	>80	Integrated	Φ174*68.5	Φ145~155	40PCS/CTN	17	15
LED 14W 4000K Wave downlight	N03E0-1023	4000K	1260	14	>80	Integrated	Φ174*68.5	Φ145~155	40PCS/CTN	17	15
LED 14W 6000K Wave downlight	N03E0-1024	6000K	1260	14	>80	Integrated	Φ174*68.5	Φ145~155	40PCS/CTN	17	15
LED 20W 3000K Wave downlight	N03E0-1025	3000K	1780	20	>80	Integrated	Φ244*84.5	Φ195~210	20PCS/CTN	15	13
LED 20W 4000K Wave downlight	N03E0-1026	4000K	1880	20	>80	Integrated	Φ244*84.5	Φ195~210	20PCS/CTN	15	13
LED 20W 6000K Wave downlight	N03E0-1027	6000K	1880	20	>80	Integrated	Φ244*84.5	Φ195~210	20PCS/CTN	15	13

INDOOR LUMINARIES



N03E0-0041



DOWNLIGHT: ROUND DOWNLIGHT WHITE INNER RING

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Hole size(mm)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
2'5 LED downlight 5W 3000K	N03E0-0039	3000K	220	Φ100×75	5	Φ85	118*115*90mm	255*250*300mm	0.22	12PCS/CTN
2'5 LED downlight 5W 5700K	N03E0-0040	5700K	280	Φ100×75	5	Φ85	118*115*90mm	255*250*300mm	0.22	12PCS/CTN
3' LED downlight 7.5W 3000K	N03E0-0041	3000K	380	Φ110×75	7.5	Φ95	118*115*90mm	255*250*300mm	0.24	12PCS/CTN
3' LED downlight 7.5W 5700K	N03E0-0042	5700K	450	Φ110×75	7.5	Φ95	118*115*90mm	255*250*300mm	0.24	12PCS/CTN



N03E0-0037



DOWNLIGHT: SQUARE DOWNLIGHT WHITE INNER RING

Product Description	Item code	Colour temperature	Luminous flux (Lm)	Product size (mm)	Input power (W)	Hole size(mm)	Packaging inner box	Packaging carton	Weight (Kg)	Quantity /Carton
LED downlight 5W 3000K	N03E0-0035	3000K	250	95×95×75	5	Φ85	155*155*85mm	328*328*280mm	0.2	12PCS/CTN
LED downlight 5W 5700K	N03E0-0036	5700K	310	95×95×75	5	Φ85	155*155*85mm	328*328*280mm	0.2	12PCS/CTN
LED downlight 9W 3000K	N03E0-0037	3000K	490	125×125×80	9	Φ105	189*189*85mm	396*396*280mm	0.3	12PCS/CTN
LED downlight 9W 5700K	N03E0-0038	5700K	590	125×125×80	9	Φ105	189*189*85mm	396*396*280mm	0.3	12PCS/CTN



N04E0-0003



LED SPOTLIGHT: REGULAR SPOTLIGHT

Product Description	Item code	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Surface color	Hole size (mm)	Product size (mm)	Driver	IP	Quantity /Carton
LED spotlight 3W 3000K LS	N04E0-0001	3	240	30	3000K	silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K LS	N04E0-0002	3	280	30	4000K	silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 6500K LS	N04E0-0005	3	280	30	6500K	silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 6W 3000K LS	N04E0-0003	6	370	30	3000K	silver	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 6W 4000K LS	N04E0-0004	6	450	30	4000K	silver	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 6W 6500K LS	N04E0-0006	6	450	30	6500K	silver	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 3W 3000K LS	N04E0-0086	3	260	30	3000K	silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K LS	N04E0-0090	3	280	30	4000K	silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 6500K LS	N04E0-0082	3	287	30	6500K	silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 5W 3000K LS	N04E0-0100	5	430	30	3000K	silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 5W 4000K LS	N04E0-0104	5	470	30	4000K	silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 5W 6500K LS	N04E0-0096	5	480	30	6500K	silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 3W 3000K SS	N04E0-0007	3	240	30	3000K	sand silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K SS	N04E0-0008	3	280	30	4000K	sand silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 6500K SS	N04E0-0011	3	280	30	6500K	sand silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 6W 3000K SS	N04E0-0009	6	370	30	3000K	sand silver	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 6W 4000K SS	N04E0-0010	6	450	30	4000K	sand silver	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 6W 6500K SS	N04E0-0012	6	450	30	6500K	sand silver	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 3W 3000K SS	N04E0-0088	3	260	30	3000K	sand silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K SS	N04E0-0094	3	280	30	4000K	sand silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 6500K SS	N04E0-0084	3	287	30	6500K	sand silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 5W 3000K SS	N04E0-0102	5	430	30	3000K	sand silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 5W 4000K SS	N04E0-0106	5	470	30	4000K	sand silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 5W 6500K SS	N04E0-0098	5	480	30	6500K	sand silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN

INDOOR LUMINARIES



N04E0-0015



LED SPOTLIGHT: REGULAR SPOTLIGHT

Product Description	Item code	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Surface color	Hole size (mm)	Product size (mm)	Driver	IP	Quantity /Carton
LED spotlight 3W 3000K SG	N04E0-0013	3	240	30	3000K	sand gold	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K SG	N04E0-0014	3	280	30	4000K	sand gold	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 6500K SG	N04E0-0017	3	280	30	6500K	sand gold	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 6W 3000K SG	N04E0-0015	6	370	30	3000K	sand gold	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 6W 4000K SG	N04E0-0016	6	450	30	4000K	sand gold	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 6W 6500K SG	N04E0-0018	6	450	30	6500K	sand gold	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 3W 3000K SG	N04E0-0087	3	260	30	3000K	sand gold	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K SG	N04E0-0093	3	280	30	4000K	sand gold	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 6500K SG	N04E0-0083	3	287	30	6500K	sand gold	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 5W 3000K SG	N04E0-0101	5	430	30	3000K	sand gold	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 5W 4000K SG	N04E0-0105	5	470	30	4000K	sand gold	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 5W 6500K SG	N04E0-0097	5	480	30	6500K	sand gold	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 3W 3000K IV	N04E0-0019	3	240	30	3000K	ivory	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K IV	N04E0-0020	3	280	30	4000K	ivory	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 6500K IV	N04E0-0023	3	280	30	6500K	ivory	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 6W 3000K IV	N04E0-0021	6	370	30	3000K	ivory	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 6W 4000K IV	N04E0-0022	6	450	30	4000K	ivory	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 6W 6500K IV	N04E0-0024	6	450	30	6500K	ivory	Φ75	Φ85×54	6W	IP20	12PCS/CTN
LED spotlight 3W 3000K IV	N04E0-0089	3	260	30	3000K	ivory	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K IV	N04E0-0095	3	280	30	4000K	ivory	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 3W 6500K IV	N04E0-0085	3	287	30	6500K	ivory	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED spotlight 5W 3000K IV	N04E0-0103	5	430	30	3000K	ivory	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 5W 4000K IV	N04E0-0107	5	470	30	4000K	ivory	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED spotlight 5W 6500K IV	N04E0-0099	5	480	30	6500K	ivory	Φ75	Φ85×54	5W	IP20	12PCS/CTN



N04E0-0049



LED SPOTLIGHT: AG SPOTLIGHT

Product Description	Item code	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Surface color	Hole size (mm)	Product size (mm)	Driver	IP	Quantity /Carton
LED spotlight 3W 3000K IV AG	N04E0-0045	3	266	30	3000K	ivory	Φ75	Φ85×43	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K IV AG	N04E0-0046	3	288	30	4000K	ivory	Φ75	Φ85×43	3W	IP20	12PCS/CTN
LED spotlight 6W 3000K IV AG	N04E0-0049	6	393	30	3000K	ivory	Φ75	Φ85×63	6W	IP20	12PCS/CTN
LED spotlight 6W 4000K IV AG	N04E0-0050	6	460	30	4000K	ivory	Φ75	Φ85×63	6W	IP20	12PCS/CTN
LED spotlight 3W 3000K IV AG	N04E0-0074	3	260	30	3000K	ivory	Φ75	Φ85×43	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K IV AG	N04E0-0075	3	280	30	4000K	ivory	Φ75	Φ85×43	3W	IP20	12PCS/CTN
LED spotlight 5W 3000K IV AG	N04E0-0078	5	430	30	3000K	ivory	Φ75	Φ85×63	5W	IP20	12PCS/CTN
LED spotlight 5W 4000K IV AG	N04E0-0079	5	470	30	4000K	ivory	Φ75	Φ85×63	5W	IP20	12PCS/CTN

*Remark:Anti-glare ring



N04E0-0052



LED SPOTLIGHT: AG SPOTLIGHT

Product Description	Item code	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Surface color	Hole size (mm)	Product size (mm)	Driver	IP	Quantity /Carton
LED spotlight 3W 3000K SS AG	N04E0-0047	3	266	30	3000K	sand silver	Φ75	Φ85×43	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K SS AG	N04E0-0048	3	288	30	4000K	sand silver	Φ75	Φ85×43	3W	IP20	12PCS/CTN
LED spotlight 6W 3000K SS AG	N04E0-0051	6	393	30	3000K	sand silver	Φ75	Φ85×63	6W	IP20	12PCS/CTN
LED spotlight 6W 4000K SS AG	N04E0-0052	6	460	30	4000K	sand silver	Φ75	Φ85×63	6W	IP20	12PCS/CTN
LED spotlight 3W 3000K SS AG	N04E0-0076	3	260	30	3000K	sand silver	Φ75	Φ85×43	3W	IP20	12PCS/CTN
LED spotlight 3W 4000K SS AG	N04E0-0077	3	280	30	4000K	sand silver	Φ75	Φ85×43	3W	IP20	12PCS/CTN
LED spotlight 5W 3000K SS AG	N04E0-0080	5	430	30	3000K	sand silver	Φ75	Φ85×63	5W	IP20	12PCS/CTN
LED spotlight 5W 4000K SS AG	N04E0-0081	5	470	30	4000K	sand silver	Φ75	Φ85×63	5W	IP20	12PCS/CTN

*Remark:Anti-glare ring

INDOOR LUMINARIES





LED SPOTLIGHT: PC SPOTLIGHT

Product Description	Item code	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Surface color	Hole size (mm)	Product size (mm)	Driver	IP	Quantity /Carton
LED PC spotlight 3W 3000K IV	N04E0-0061	3	250	30	3000K	ivory	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED PC spotlight 3W 4000K IV	N04E0-0062	3	280	30	4000K	ivory	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED PC spotlight 5W 3000K IV	N04E0-0063	5	420	30	3000K	ivory	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED PC spotlight 5W 4000K IV	N04E0-0064	5	450	30	4000K	ivory	Φ75	Φ85×54	5W	IP20	12PCS/CTN





LED SPOTLIGHT: PC SPOTLIGHT

Product Description	Item code	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Surface color	Hole size (mm)	Product size (mm)	Driver	IP	Quantity /Carton
LED PC spotlight 3W 3000K MS	N04E0-0108	3	250	30	3000K	matt silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED PC spotlight 3W 4000K MS	N04E0-0109	3	280	30	4000K	matt silver	Φ75	Φ85×34	3W	IP20	12PCS/CTN
LED PC spotlight 5W 3000K MS	N04E0-0110	5	420	30	3000K	matt silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED PC spotlight 5W 4000K MS	N04E0-0111	5	450	30	4000K	matt silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN





LED SPOTLIGHT: COB SPOTLIGHT

Product Description	Item code	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Surface color	Hole size (mm)	Product size (mm)	Driver	IP	Quantity /Carton
LED COB spotlight 3W 3000K SS	N04E0-0067	3	280	30	3000K	sand silver	Φ75	Φ85×54	3W	IP20	12PCS/CTN
LED COB spotlight 3W 4000K SS	N04E0-0068	3	300	30	4000K	sand silver	Φ75	Φ85×54	3W	IP20	12PCS/CTN
LED COB spotlight 5W 3000K SS	N04E0-0072	5	420	30	3000K	sand silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED COB spotlight 5W 4000K SS	N04E0-0073	5	460	30	4000K	sand silver	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED COB spotlight 3W 3000K IV	N04E0-0065	3	280	30	3000K	ivory	Φ75	Φ85×54	3W	IP20	12PCS/CTN
LED COB spotlight 3W 4000K IV	N04E0-0066	3	300	30	4000K	ivory	Φ75	Φ85×54	3W	IP20	12PCS/CTN
LED COB spotlight 5W 3000K IV	N04E0-0069	5	420	30	3000K	ivory	Φ75	Φ85×54	5W	IP20	12PCS/CTN
LED COB spotlight 5W 4000K IV	N04E0-0070	5	460	30	4000K	ivory	Φ75	Φ85×54	5W	IP20	12PCS/CTN

COMMERCIAL LUMINARIES

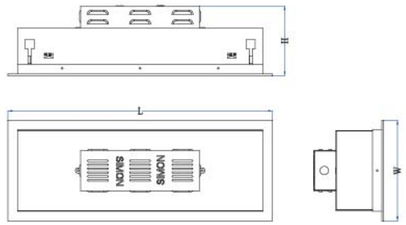

N64E0-1091



LED GRILLED SPOTLIGHTS

Product Description	Item code	Input voltage (V)	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Hole size (mm)	Product size (mm)	Driver	IP	Quantity /Carton
LED single-head grilled spotlight 9W 3000K	N64E0-1091	AC220-240V	9	523	30	3000K	165x165	190x190x135	Integrated	IP20	8PCS/CTN
LED twin-head grilled spotlight 18W 3000K	N64E0-2181	AC220-240V	18	966	30	3000K	345x165	375x190x135	Integrated	IP20	4PCS/CTN

LED STRIPLIGHTS

Product Description	Item code	Input voltage(V)	Power (W/M)	Light colour	LED type	No. of LED	IP	Quantity /Carton
LED striplight WP 5050-30 4000K	N67E0-1007	DC12V	7.2W/m	4000K	5050	30pcs/m	IP65	10PCS/CTN
LED striplight WP 5050-30 3000K	N67E0-1008	DC12V	7.2W/m	3000K	5050	30pcs/m	IP65	10PCS/CTN
LED striplight WP 5050-30 Blue	N67E0-1009	DC12V	7.2W/m	Blue	5050	30pcs/m	IP65	10PCS/CTN
LED striplight WP 5050-30 6500K	N67E0-1019	DC12V	7.2W/m	6500K	5050	30pcs/m	IP65	10PCS/CTN
LED striplight BB 3528-60 6500K	N67E0-1010	DC12V	4.5W/m	6500K	3528	60pcs/m	IP20	10PCS/CTN
LED striplight BB 3528-60 4000K	N67E0-1020	DC12V	4.5W/m	4000K	3528	60pcs/m	IP20	10PCS/CTN
LED striplight BB 3528-60 3000K	N67E0-1012	DC12V	4.5W/m	3000K	3528	60pcs/m	IP20	10PCS/CTN
LED striplight BB 3528-60 Blue	N67E0-1013	DC12V	4.5W/m	Blue	3528	60pcs/m	IP20	10PCS/CTN
LED striplight BB 5050-30 RGB	N67E0-1014	DC12V	7.2W/m	RGB	5050	30pcs/m	IP20	10PCS/CTN
LED striplight BB 5050-30 6500K	N67E0-1015	DC12V	7.2W/m	6500K	5050	30pcs/m	IP20	10PCS/CTN
LED striplight BB 5050-30 4000K	N67E0-1016	DC12V	7.2W/m	4000K	5050	30pcs/m	IP20	10PCS/CTN
LED striplight BB 5050-30 3000K	N67E0-1017	DC12V	7.2W/m	3000K	5050	30pcs/m	IP20	10PCS/CTN
LED striplight BB 5050-30 Blue	N67E0-1018	DC12V	7.2W/m	Blue	5050	30pcs/m	IP20	10PCS/CTN
LED3528 high-voltage striplight 3000K	N6724-0010	220VAC	4.5W/m	3000K	3528	60pcs/m	IP20	100M/CTN
LED3528 high-voltage striplight 4000K	N6724-0012	220VAC	4.5W/m	4000K	3528	60pcs/m	IP20	100M/CTN
LED3528 high-voltage striplight 6500K	N6724-0014	220VAC	4.5W/m	6500K	3528	60pcs/m	IP20	100M/CTN
LED5050 high-voltage striplight 3000K	N6724-0016	220VAC	8W/m	3000K	5050	60pcs/m	IP20	50M/CTN
LED5050 high-voltage striplight 4000K	N6724-0018	220VAC	8W/m	4000K	5050	60pcs/m	IP20	50M/CTN
LED5050 high-voltage striplight 6500K	N6724-0028	220VAC	8W/m	6500K	5050	60pcs/m	IP20	50M/CTN
Driver for LED Strip Light	N6500-0302		30W					



N04E0-0025



COMMERCIAL DOWNLIGHT: SEMICIRCLE COVER ADJUSTABLE DOWNLIGHT

Product Description	Item code	Rated Current	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Hole size (mm)	Product size (mm)	Quantity /Carton
LED semicircle cover adjustable downlight 6W 3000K	N04E0-0025	360mA	6	270	30	3000K	Φ78	Φ85x120	12PCS/CTN
LED semicircle cover adjustable downlight 9W 3000K	N04E0-0026	540mA	9	447	30	3000K	Φ78	Φ85x120	12PCS/CTN



N04E0-0027



COMMERCIAL DOWNLIGHT: EILLPSE COVER ADJUSTABLE DOWNLIGHT

Product Description	Item code	Rated Current	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Hole size (mm)	Product size (mm)	Quantity /Carton
LED ellipse cover adjustable downlight 6W 3000K	N04E0-0027	360mA	6	110	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN
LED ellipse cover adjustable downlight 9W 3000K	N04E0-0028	540mA	9	180	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN

COMMERCIAL LUMINARIES



N04E0-0041



COMMERCIAL DOWNLIGHT: CIRCLE COVER NON-ADJUSTABLE DOWNLIGHT

Product Description	Item code	Rated Current	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Hole size (mm)	Product size (mm)	Quantity /Carton
LED circle cover non-adjustable downlight 6W 3000K	N04E0-0041	360mA	6	130	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN
LED circle cover non-adjustable downlight 9W 3000K	N04E0-0042	540mA	9	237	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN



N04E0-0033



COMMERCIAL DOWNLIGHT: BLACK ANTI-GLARE REFLECTOR ADJUSTABLE DOWNLIGHT

Product Description	Item code	Rated Current	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Hole size (mm)	Product size (mm)	Quantity /Carton
LED black anti-glare reflector adjustable downlight 6W 3000K	N04E0-0033	360mA	6	250	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN
LED black anti-glare reflector adjustable downlight 9W 3000K	N04E0-0034	540mA	9	413	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN



N04E0-0031



COMMERCIAL DOWNLIGHT: WHITE ANTI-GLARE REFLECTOR ADJUSTABLE DOWNLIGHT

Product Description	Item code	Rated Current	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Hole size (mm)	Product size (mm)	Quantity /Carton
LED white anti-glare reflector adjustable downlight 6W 3000K	N04E0-0031	360mA	6	270	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN
LED white anti-glare reflector adjustable downlight 9W 3000K	N04E0-0032	540mA	9	454	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN



N04E0-0035



COMMERCIAL DOWNLIGHT: MIRROR REFLECTOR ADJUSTABLE DOWNLIGHT

Product Description	Item code	Rated Current	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Hole size (mm)	Product size (mm)	Quantity /Carton
LED mirror reflector adjustable downlight 6W 3000K	N04E0-0035	360mA	6	280	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN
LED mirror reflector adjustable downlight 9W 3000K	N04E0-0036	540mA	9	465	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN

COMMERCIAL LUMINARIES



N04E0-0037



COMMERCIAL DOWNLIGHT: MATT REFLECTOR ADJUSTABLE DOWNLIGHT

Product Description	Item code	Rated Current	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Hole size (mm)	Product size (mm)	Quantity /Carton
LED matt reflector adjustable downlight 6W 3000K	N04E0-0037	360mA	6	275	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN
LED matt reflector adjustable downlight 9W 3000K	N04E0-0038	540mA	9	462	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN



N04E0-0039



COMMERCIAL DOWNLIGHT: CHAMPAGNE REFLECTOR ADJUSTABLE DOWNLIGHT

Product Description	Item code	Rated Current	Input power (W)	Luminous flux (Lm)	Beam angle (°)	Colour temperature	Hole size (mm)	Product size (mm)	Quantity /Carton
LED champagne reflector adjustable downlight 6W 3000K	N04E0-0039	360mA	6	270	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN
LED champagne reflector adjustable downlight 9W 3000K	N04E0-0040	540mA	9	447	Φ85x120	3000K	Φ78	Φ85x120	12PCS/CTN



N67D1-0021



LED PANEL LIGHTS

Product Description	Item code	Input power (W)	Luminous flux (Lm)	Colour temperature	Product size (mm)	Cutt off size	Packaging inner box	Weight (Kg)	Quantity /Carton
Economic panel light 6000K 1200×300	N67D1-0022	36	2800	6000K	1196x296x50	281x1181	1247*327*350mm	2.8	6PCS/CTN
Economic panel light 6500K 600x600	N67D1-0021	36	3000	6500K	595x595x46	582×582	647*327*650mm	2.8	6PCS/CTN
LED 40W3000K 600×600 panel lamp	N67E0-0011	40	3000	3000K	596x596x11.2	580x580	640*700*55mm	3.75	6PCS/CTN
LED 40W 4000K 600×600 panel lamp	N67E0-0008	40	3200	4000K	596x596x11.2	580x580	640*700*55mm	3.75	6PCS/CTN
LED 40W 5000K 600×600 panel lamp	N67E0-0013	40	3300	5000K	596x596x11.2	580x580	640*700*55mm	3.75	6PCS/CTN
LED 40W 3000K 1200×300 panel lamp	N67E0-0017	40	3000	3000K	1196x296x11.2	280x1180	1300*343*55mm	3.6	6PCS/CTN
LED 40W 4000K 1200×300 panel lamp	N67E0-0015	40	3200	4000K	1196x296x11.2	280x1180	1300*343*55mm	3.6	6PCS/CTN
LED 40W 5000K 1200×300 panel lamp	N67E0-0019	40	3300	5000K	1196x296x11.2	280x1180	1300*343*55mm	3.6	6PCS/CTN



N6224-0068



TUBES

Product Description	Item code	Input power (W)	Luminous flux (Lm)	Colour temperature	Product size (mm)	Packaging carton	Packaging inner box	Weight (Kg)	Quantity /Carton
LED T8 8W 3000K	N6224-0068	8	540	3000K	ΦMAXx28.8x604	687*168*170mm	609*30*30mm	2.6	25PCS/CTN
LED T8 8W 4000K	N6224-0069	8	580	4000K	ΦMAXx28.8x604	687*168*170mm	609*30*30mm	2.6	25PCS/CTN
LED T8 8W 6000K	N6224-0070	8	620	6000K	ΦMAXx28.8x604	687*168*170mm	609*30*30mm	2.6	25PCS/CTN
LED T8 16W 3000K	N6224-0071	16	1050	3000K	ΦMAXx28.8x1213	1296*168*170mm	1218*30*30mm	5.6	25PCS/CTN
LED T8 16W 4000K	N6224-0072	16	1150	4000K	ΦMAXx28.8x1213	1296*168*170mm	1218*30*30mm	5.6	25PCS/CTN
LED T8 16W 6000K	N6224-0073	16	1250	6000K	ΦMAXx28.8x1213	1296*168*170mm	1218*30*30mm	5.6	25PCS/CTN
LED T8 18W 3000K	N65E0-0092	18	1600	3000K	ΦMAXx28x1198	1235*168*170mm	1218*30*30mm	4.2	25PCS/CTN
LED T8 18W 4000K	N65E0-0093	18	1700	4000K	ΦMAXx28x1198	1235*168*170mm	1218*30*30mm	4.2	25PCS/CTN
LED T8 18W 6500K	N65E0-0091	18	1750	6000K	ΦMAXx28x1198	1235*168*170mm	1218*30*30mm	4.2	25PCS/CTN