

HPS-DAK-SR Manual Pull Station for Fire Suppression Release




SPECIFICATIONS	
Model	HPS-DAK-SR
Contact	(1) Form A
Contact Rating	10A @ 120 VAC
Operating Temperature	-30°F (-35 °C) ~ 150°F (66°C)

STANDARD FEATURES

- Metal Construction
- Enclosed switch with glass rod (included)
- UL, CSFM Listed
- Made in USA

ELECTRICAL WIRING

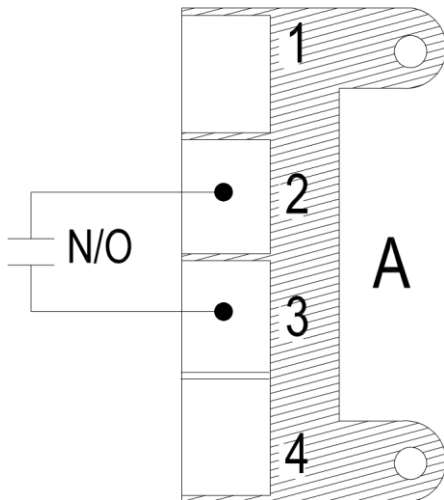

DESCRIPTION

HPS-DAK-SR is a dual action (lift & pull) fire suppression release manual pull station. HPS-DAK-SR model is constructed of a solid die cast housing and comes in glossy red. The back switch plate is plated steel. The electrical switch is rated for 10 Amps @ 120 VAC normally open contact rating. All models are connected via terminal block connections.

PRODUCT LISTINGS



California
State Fire
Marshal

7150-0410:162

Hochiki America Corporation

7051 Village Drive, Suite 100 Buena Park, CA 90621-2268

Phone: 714/522-2246 Fax: 714/522-2268

Technical Support: 800/845-6692 or technicalsupport@hochiki.com



Find latest revision at www.hochiki.com

